



Important: Throughout the spring and summer seasons our we do quote submissions on a first come first serve basis and work hard to do them right the first time. We believe in honoring our commitment to each customer that requests a quotation, therefore we can not consider demands for immediate quotations. We will generally be able turn quotations in about 24-36 hours. During peak season we will require up to 3 days to do a quotation.

Basic Information

Name:

City of Installation:

State:

Contact Tel #

(We do not call unless your email address is entered incorrectly)

Email Address:

(We have never sold or exchanged your email addresses or other information with any other company!)

Load Requirement Information

Your city building department is where building permits are issued from. You may or may not need an actual permit for your installation, and this is left as the sole responsibility of the homeowner. **It is our strong recommendation that you acquire your permit prior to purchase.** However, panel thickness, beam placements, beam size, distance between posts out front... all are a function of the load (**snow & wind**) that your cover will be subject to. Even though you may not require a permit, you will still need to contact them to get your local building code requirements so that we can supply you with the 'correct' materials!

Snow Load (lbs./sq.ft.):

Wind Load (mph):

Will you be getting a permit?

YES


☐

NO

☐

Our Terminology

(Use this information to fill out the next page...)

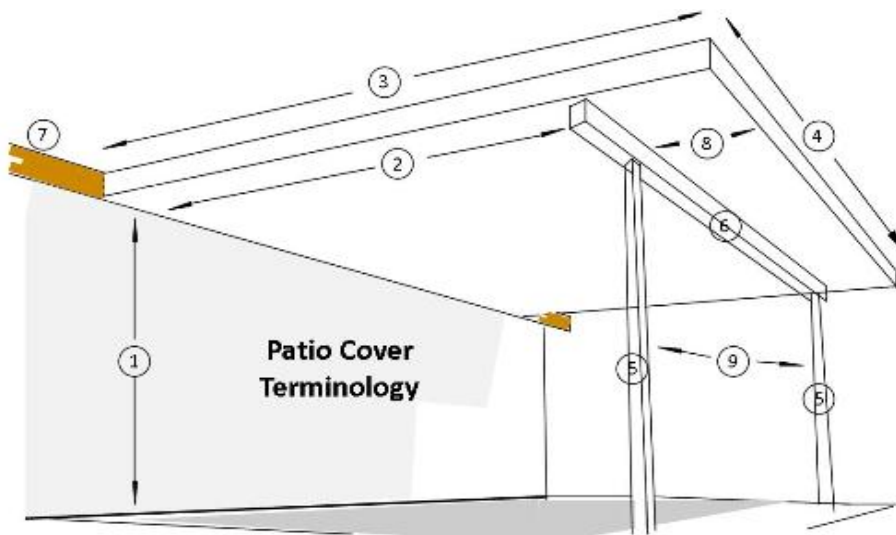

1. Height
2. Panel Span (beam placement)
3. Total Projection
4. Width
5. Post
6. Beam
7. Fascia / Wall
8. Front Overhang
9. Distance Between Posts

Patio Cover Details

Select which type of patio cover you require (one selection only)

Top Only Cover

☐

(Beam & Posts **NOT** Included)

Complete Cover

☐

(Beam & Posts Included)

Free Standing Cover

☐

(2 Sets of Beam & Posts Included)

Projection:

ft.

in.

This is the total distance **away** from the wall or fascia board, **including** the overhang past the front beam & post assembly.

Width:

ft.

in.

This is the total distance **parallel** to house wall. Your roof panels are a combination of 4' wide and 2' wide panels. All panels can/will be trimmed on site!

(Total distance parallel to house wall)

Height at House:

ft.

in.

(From deck to the underside of roof installation point)

Desired Overhang:

ft.

in.

(Amount of awning past the front beam & post assembly. Max is 3' or 25% of awning span - whichever is less.)

Posts attached to deck / patio

☐

Posts buried in the ground

☐

Fan Beam Installation #

(One per panel)

Roof Panel Color Selection

White

Sand

Wheat

Eggshell

Side Fascia / Front Gutter Color Selection

White

Clay

Bronze

Black

6" thick roof comes with white aluminum drip edge fascia only

Beam Color Selection

White

Ivory

Bronze

Black

Only 3" roof profiles and 3" x 3" post & beams are available in black

Post Color Selection

White

Ivory

Bronze

Black

Roof Panel Colors



WHITE



WHEAT



CLAY/SAND




IVORY/EGGSHELL


Extrusion Colors



BRONZE



WHITE



IVORY/EGGSHELL



CLAY/SAND



BLACK

Save this PDF to your desktop and then send it

... by email: quote@homeporchandpatiokits.com

... by fax: 1.705.259.2264